


UNIT OF MEASURE	A	B	C	D	E	LENGTH OVERALL	MAX. BUNDLE DIA.	MIN. TENSILE STRENGTH
INCHES	.180	.168	.097	.149	.037	4.34	.75	18 lbs.
MM	4.57	4.27	2.46	3.78	.94	110.	19.1	8.165 kg.

UNIT OF MEASURE	F	G	H	J	L	W
INCHES	3.915	.364	.810	.033	.736	.307
MM	99.44	9.25	20.57	.84	18.69	7.80

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN AMP PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM AMP INCORPORATED, HARRISBURG, PA.

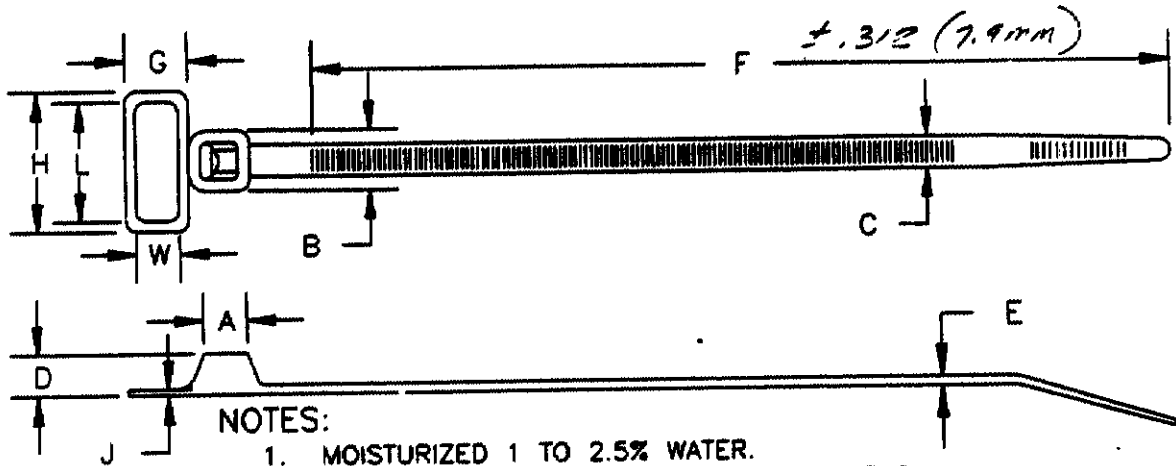

NOTES:

1. MOISTURIZED 1 TO 2.5% WATER.
2. PACKAGED IN HEAT SEALED 3 MIL POLYBAG WITH LABEL PER DWG 404707.

APC ENGINEERING

JUL 13 1990

ISSUED BY *Accu*

CUSTOMER DRAWING UNPUBLISHED

	6-603230-9	NATURAL 200 FTY34D	
	1-603230-9	NATURAL 100 FTY34C	
	DWG SIZE	PART No.	DESCRIPTION
		REVISION OF EACH ASSY NO. (WHEN BLANK, USE DWG REVISION)	

LOC	D
DIST	1

QTY. REQ'D. PER ASSY.

PARTS LIST

			MATERIAL NYLON 6/6	HEAT TREAT	FINISH
			DIMENSIONS ARE IN INCHES	DRAWN BY: AD-TER/VL	DATE: 5/25/90
			TOLERANCES UNLESS OTHERWISE SPECIFIED: 2 PL DEC ± 3 PL DEC ± .039 4 PL DEC ±	CHECK BY: BJM 6/90	APPROVED BY: 7. Hamed 6/90
			ANGLES ± SURF TEXTURE: J	AMP INCORPORATED Harrisburg, Pa.	
			REMOVE BURRS, BREAK SHARP EDGES, .015 R. MAX.	NAME: IDENTIFICATION CABLE TIE 4-1/4 INCH	
✓	C	ECN 062890	APP DATE	SCALE: A	DRAWING No.: 603230
P	F	LTR	REVISION RECORD	APP DATE	SHEET: 1 OF 1
					REV.: C