


- NOTES:
- 1.0 ELECTRICAL SPECIFICATIONS:
    - 1.1 FREQUENCY RANGE: DC to 18.0 GHz
    - 1.2 ATTENUATION VALUES AND ACCURACY:
      - 1.2.1 0 dB +0.3 dB
      - 1.2.2 1 to 10 dB ±0.3 dB
      - 1.2.3 11 to 20 dB ±0.5 dB
      - 1.2.4 21 to 40 dB ±1.0 dB
      - 1.2.5 41 to 60 dB ±1.5 dB
    - 1.3 VSWR: 1.07 + .015f (GHz)

- 2.0 MAXIMUM INPUT POWER:  
2 WATTS AVERAGE AT +25°C DERATED LINEARLY TO 0.5 WATTS AT +125°C
- 3.0 OPERATING TEMPERATURE RANGE: -65°C TO +125°C
- 4.0 MARKING: MARK UNIT AS SHOWN  
(REF.: INK-03803-27-XX)
- 5.0 DIMENSIONS IN PARENTHESIS ARE IN MILLIMETERS.

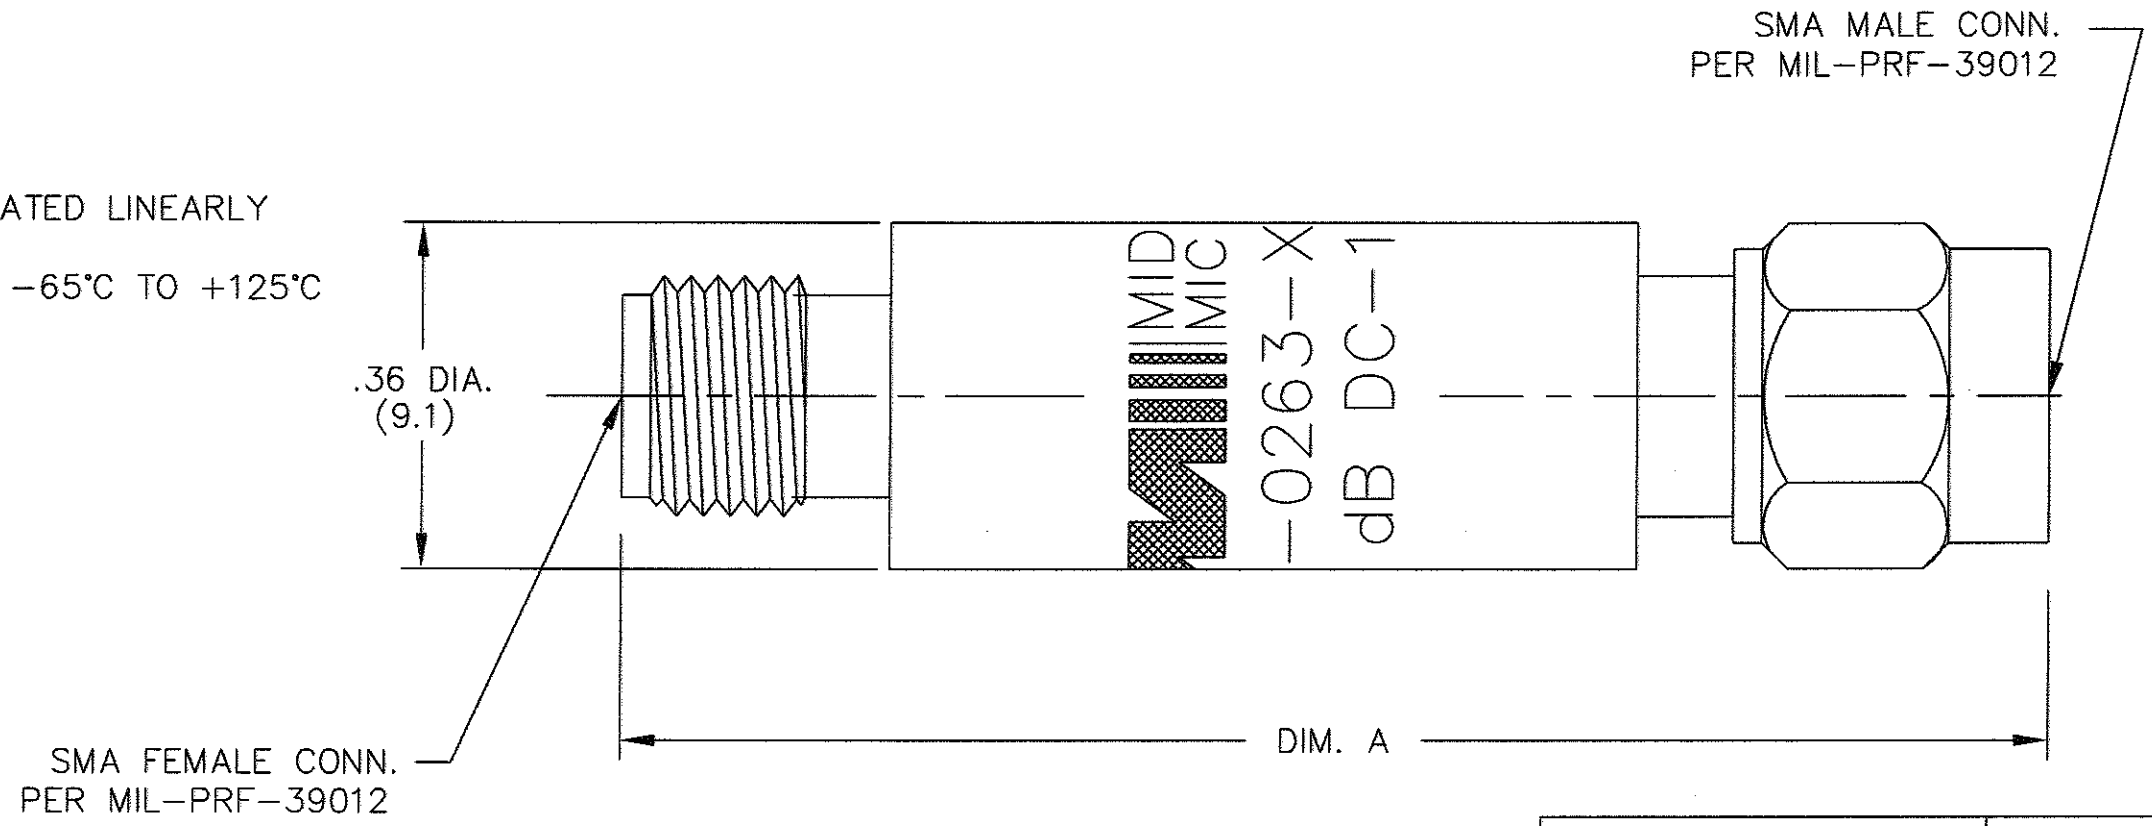

21 to 60 dB	1.49(37.8)
0 to 20 dB	1.20(30.5)
-XX- ATTENUATION VALUE	DIM A

WAS DWG. 02332-01-00

ATT-0263-XX-000-02 AND ATT-0263-XX-SMA-02 ARE IDENTICAL MARKING SHOULD MATCH MODEL NUMBER AS IT APPEARS ON PURCHASE ORDER.

REV.	DESCRIPTION	DATE
-	RELEASED	8/26/90
A	ECR 3656	6/17/85
B	ECR 4003	11/1/85
C	ECR 4689	7/24/86
D	ECR 6545	7/20/89
E	ECR 6933	8/17/90
E1	CORRECT MARKING	4/25/91
E2	UPDATE MODEL NO.	8/20/92
F	ECN 12471	10/1/93
G	ECN 20115	10/5/04

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:		FSCM NO. <b>34078</b>		<b>MIDWEST MICROWAVE</b>	
3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1°		NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave		TITLE MINIATURE ATTENUATOR	
		DRAWN/DATE D.ESTY 8/15/90	ENG./DATE G.KOZAK 8/26/90	DRAWING NUMBER ATT-0263-XX-SMA-02	
		CHECKED/DATE A.BEATTY 8/26/90	APPROVED/DATE	SCALE: 5=1	SHEET 1 of 1