




UNIT:mm

5000±50mm

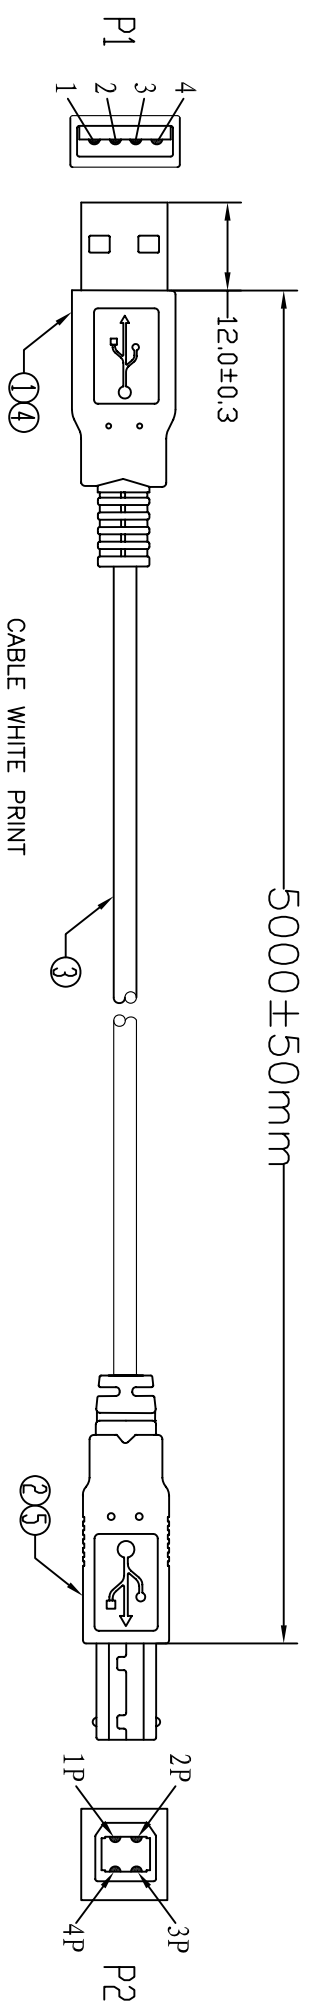

CABLE WHITE PRINT
 USB CABLE E189529 AWM 2725 28AWG/1PR AND
 24AWG/2C 80°C 30V VW-1

PIN ASSIGNMENT:

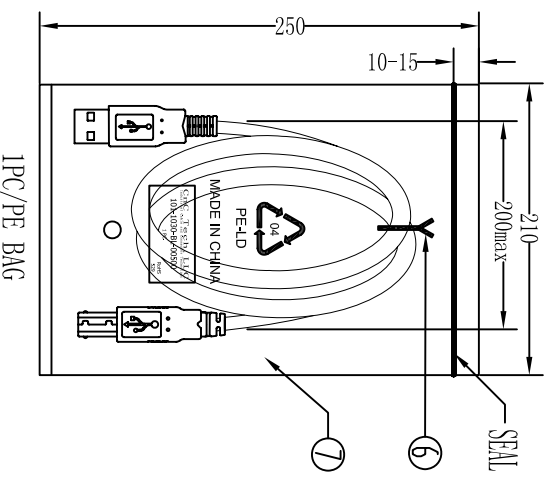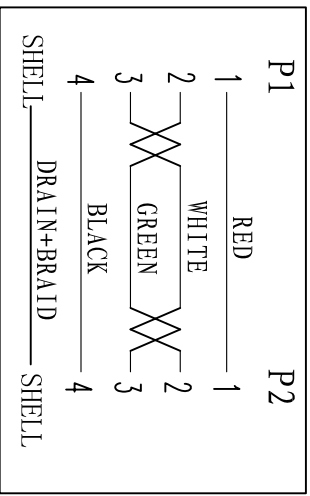

Electrical test:
 1. 100% short, open, miswire test
 2. Conduct resistance: 5 Ohm(max)
 3. Insulation resistance: 5Mohm(min)
 4. dielectric test: DC 300V

⑧	PE BAG	1/5	CLEAR SIZE: 330*380*0.05mm PRINT BLACK "MADE IN CHINA" + "5PCS".
⑦	PE BAG	1	CLEAR SIZE: 210*250*0.05mm PRINT BLACK "MADE IN CHINA" + "1PC".
⑥	TIE	1	BLACK L=150mm
⑤	OUT JACKET	6g	BLACK PVC-40P (MOULD NO.: MW-65)
④	OUT JACKET	6g	BLACK PVC-40P (MOULD NO.: MW-40)
③	CABLE	1	BLACK USB1. 1 U12725 28#/1P+24#/2C+AEB OD: 4.7mm L=5000±20mm
②	CONN	1set	USB B MALE SHELL: NICKEL. PIN G/F 3PCS TYPE INSULATOR COLOR: WHITE
①	CONN	1set	USB A MALE SHELL: NICKEL. PIN G/F 4PCS TYPE INSULATOR COLOR: WHITE
NO.	NAME	QTY	SPECIFICATION

CNC Tech, LLC
 Industrial Cable and Connector Technology

DRAWN	ZHONGHS	DRAWING NO	
CHECKED		CUSTOMER	
APPROVAL		ITEM NO.	101-1030-BL-00500
DECIDED		DATE	2011-10-25
VERSIONS/EDITION	A/0	PROJECTION	

A

B

C

D

A

B

C

D

4

4

3

3

2

2

1

1