


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION, 19 .
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
FT	22				E	REDRAWN PER 0010-0067-94	2/18/94	HR
					F	REV PER EC 0320-349-97	27 OCT 97	NS

1. RETAINING SPRINGS TO BE USED ON OPPOSITE SIDE OF CARD SLOT FOR SINGLE SIDED PC BOARD APPLICATIONS. USE 1 RETAINING SPRING PER 6 CRIMP STYLE CONTACTS, FOR EXAMPLE: 36 POSN-6 SPRINGS; 30 POSN-5 SPRINGS; 24 POSN-4 SPRINGS; 18 POSN-3 SPRINGS ETC...

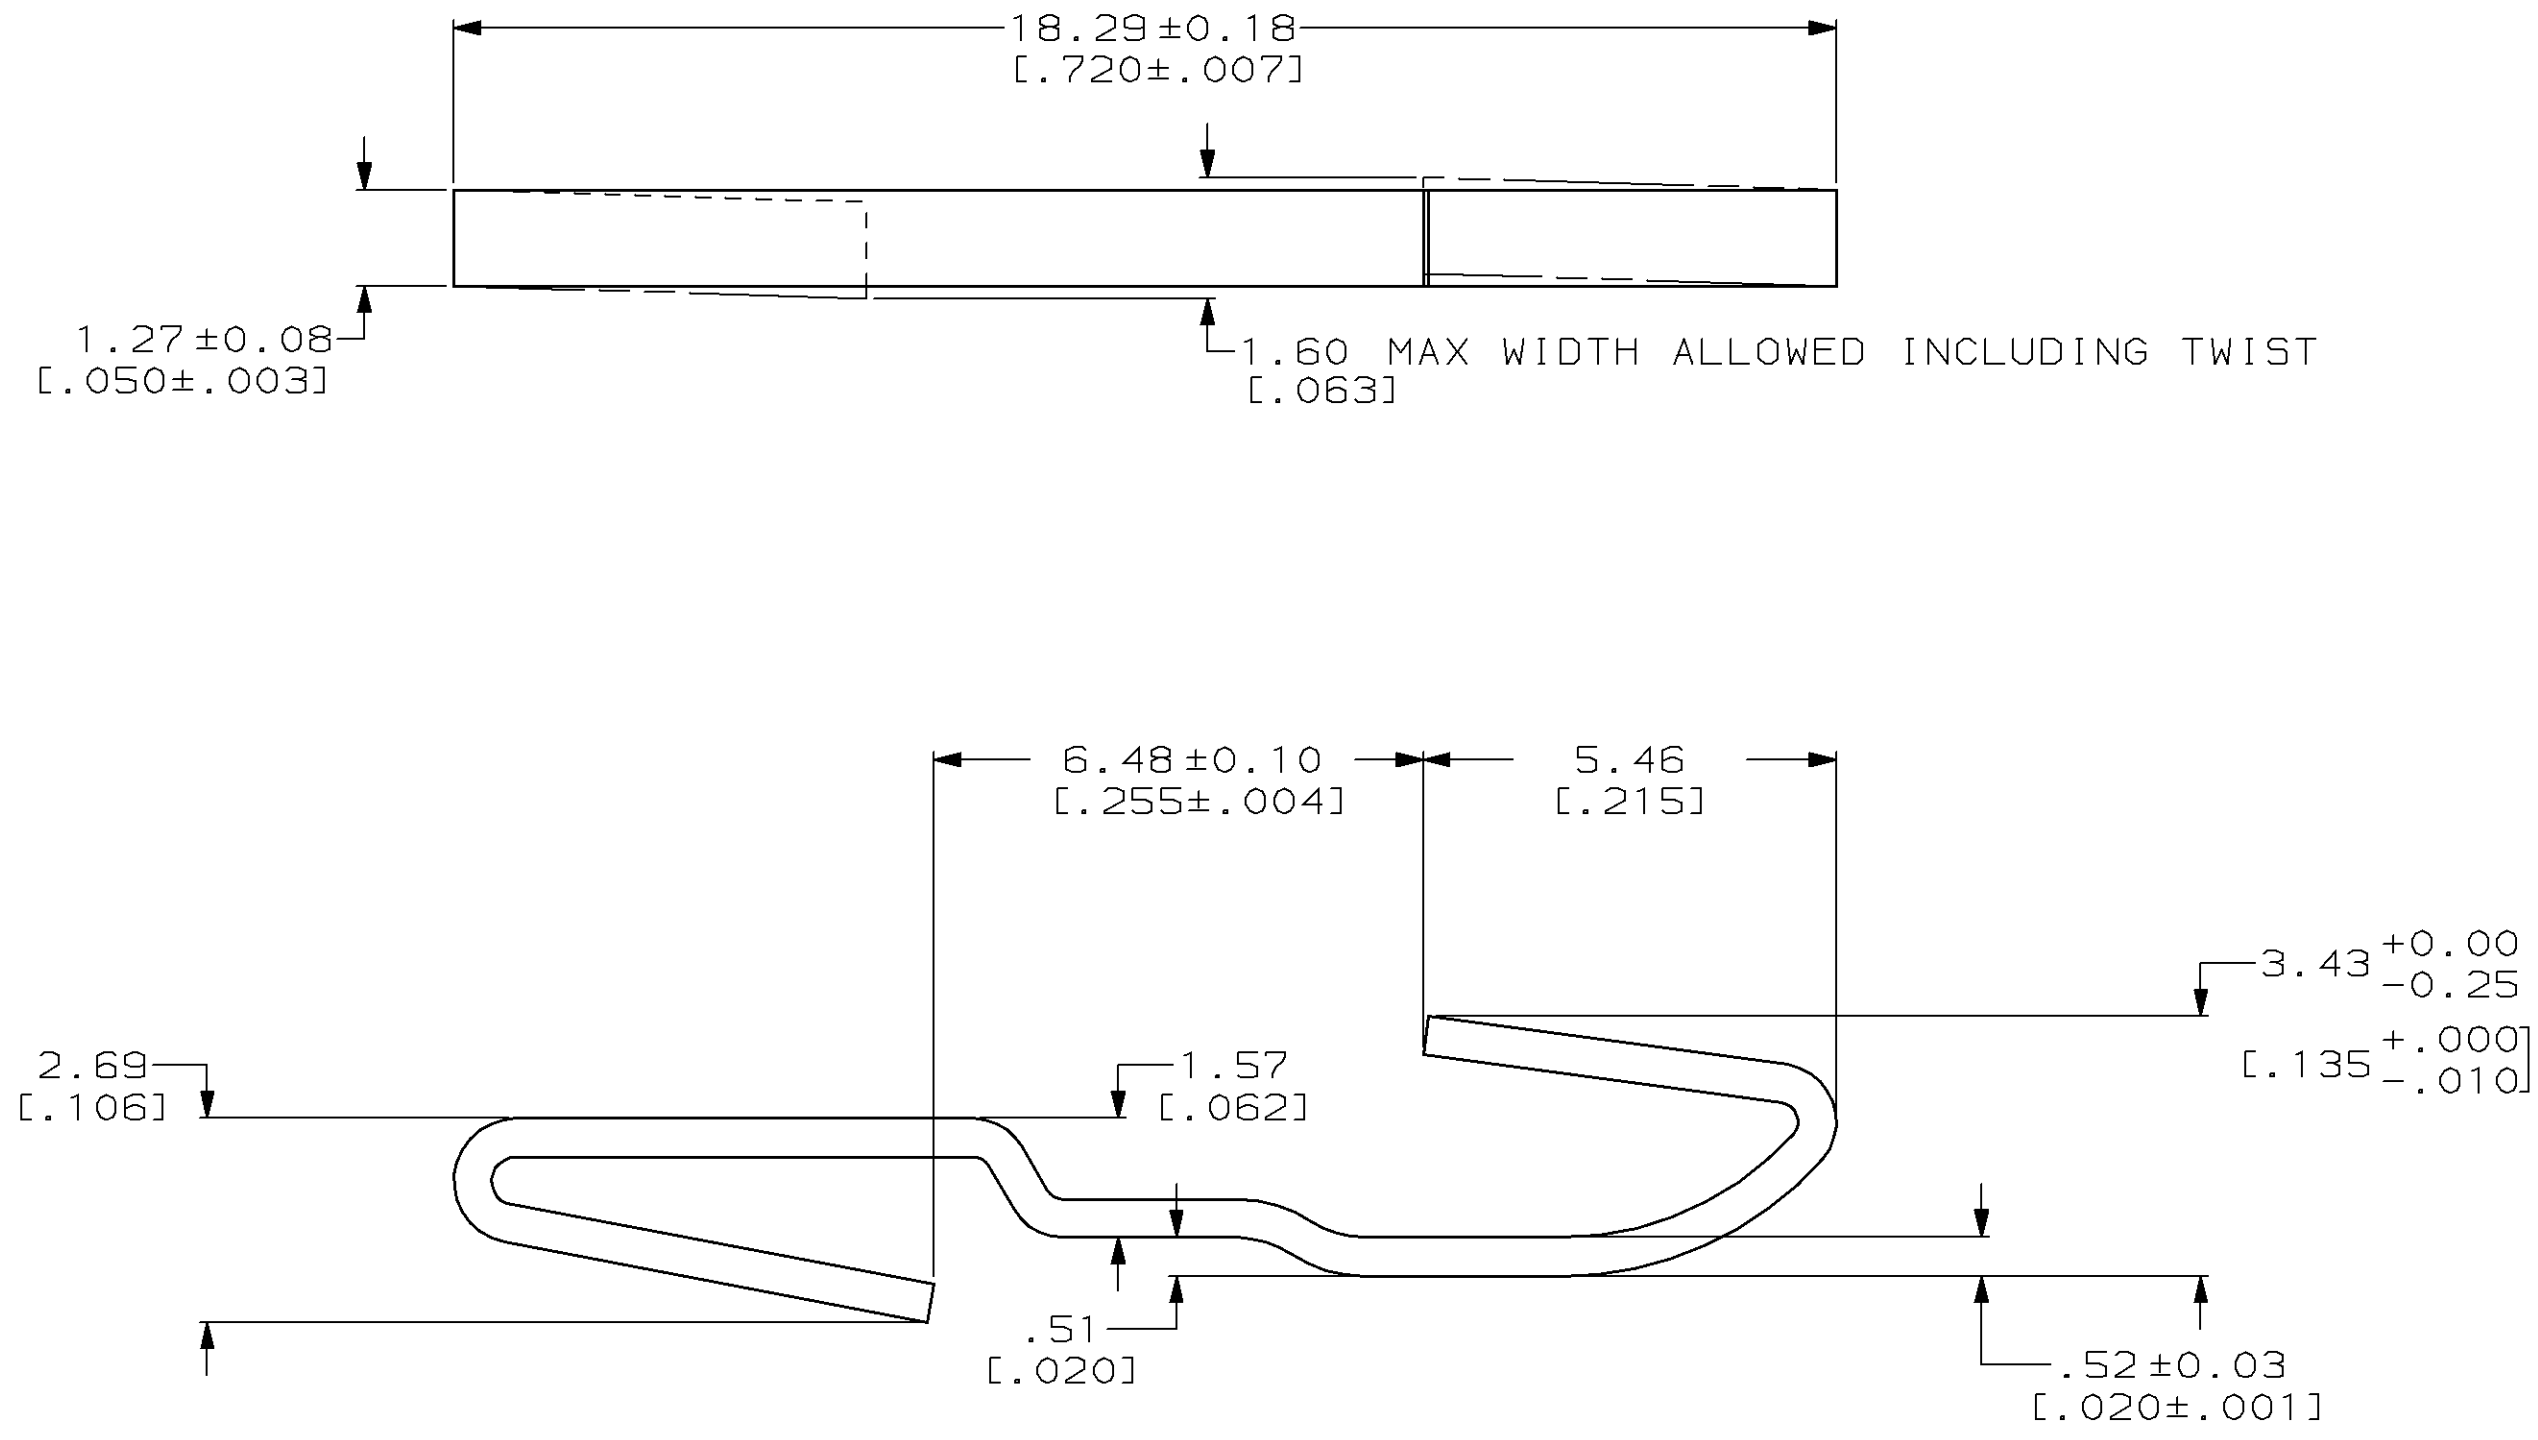

FINISH	PART NO
.000050 NICKEL ALL OVER	583691-4
.000010 GOLD OVER .000050 NICKEL	583691-3
UNPLATED	583691-2

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON : 2 PLC DEC ± - 3 PLC DEC ± .005 ANGLES ± -	DR 8-2-93 A. STAUB BG	AMP Incorporated Harrisburg, PA 17105-3608
	CHK 2/18/94 H ROSE	
MATERIAL STAINLESS STEEL	APPD 2/18/94 H ROSE	NAME SPRING, RETAINER
	APPD 2/18/94 M THUMMA	
FINISH -	PRODUCT SPEC -	SIZE C 00779
	APPLICATION SPEC -	
THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.	WEIGHT -	DRAWING NO C=583691
		SCALE 10:1
		SHEET 1 OF 1